

AE-0806 RD-125 Power Supply Box


Rev. 1.00



Protected against:

- Short circuits
 - Overloads
 - Voltage input up to 5-second 300VAC surge
- Cooling: obtained by air convection
Max. operating temperature: 70°C

INPUT	110 / 230 VAC built-in selection switch - 50 / 60 Hz AC current draw: 2A (230V) - 3A (110V)
OUTPUTS	Voltage range: 12VDC, $\pm 2\%$ (line 1 CH1) - 24VDC, $+8/-5\%$ (line 2 CH2) Current range: 1-7A (line 1 CH1 = 12VDC) - 0,4-5A (line 2 CH2 = 24VDC) Rated current: 3,7° / Rated output power: 125 W
PROTECTION	Overload up to 150% of rated output power - recovers automatically after fault condition is removed Over -voltage up to 16V on line 1 (CH1) - recovers automatically after fault condition is removed
ENVIRONMENT CONDITONS	Operating: -25...+70 °C (20 ~ 90% RH non-condensing) Storage: -40 ~ +85°C, 10 ~ 95% RH
DETAILS	Size: 199 x 98 x 38 mm (L x W x H) - Weight: 0,7 Kgs

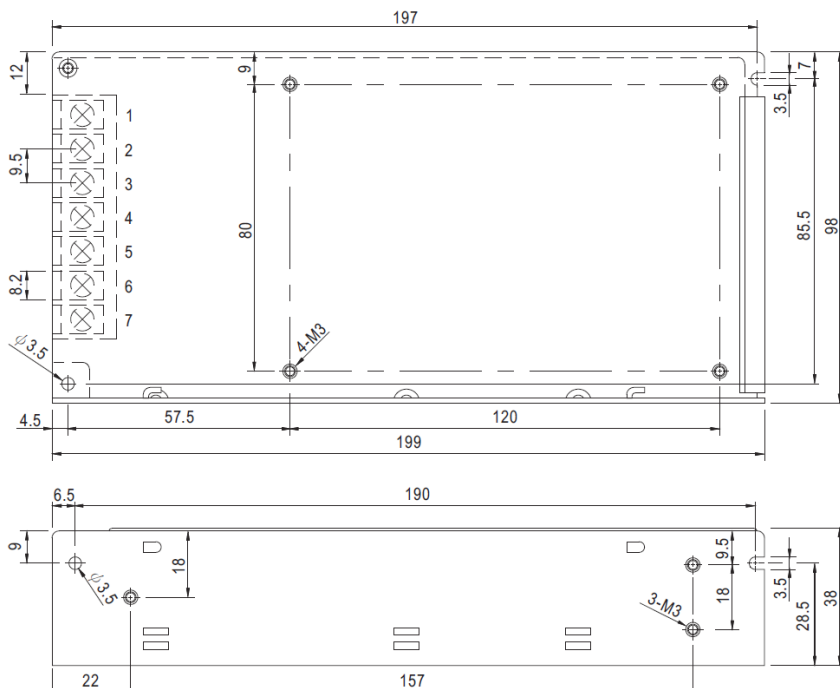

Terminal	Function
L	Line in
N	Neutral in
G	Ground
COM	Common 24 VDC
+ V2	24 VDC out
COM	Common 12 VDC
+ V1	12V DC out



Alberici
CASH SOLUTIONS

Progettazione e produzione di sistemi di pagamento e accessori per macchine Gaming, Vending e Car-Wash

Via Cà Bianca, 421 - 40024
Castel San Pietro Terme (BO) - Italy

Tel.: +39.051.944300
Fax.: +39.051.944594

Web: www.alberici.net
E.mail: info@alberici.net